



The QuikCAT emitter provides flexibility in every facet to provide the proper solution to any application.

- Two Categories of high performance infrared emitters, both CSA and FM certifications as flameless catalytic gas infrared emitters:
 - WX series (explosion – proof emitter) certified by CSA, CE/ATEX and FM for Class 1, Division 1, Group D hazardous area applications. Also 33% more energy efficient than any competitive emitter.
 - G series (high performance hot catalyst emitters) certified CSA and FM for non-hazardous area applications.
- Variety of preheat voltages ranging from 12VDC to 600VAC.
- Natural Gas (NG) or propane (LPG).
- Variety of mounting brackets. Standard perimeter flanges (FC), rear mounting flanges (LS – Long Side, SS- Short Side) or special angle mounting flanges.
 - Optional flanges
 - SS
 - LS
 - SS + LS
 - FC

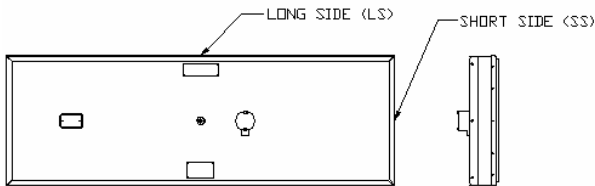

REAR MOUNTING FLANGE ILLUSTRATION

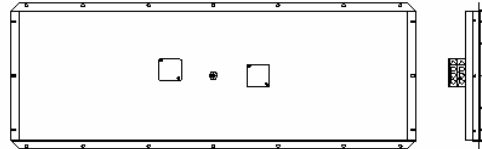

PERIMETER (FC) FLANGE ILLUSTRATION

- Variety of emitter temperature monitoring devices. Snap switches, thermocouple or thermostwitch.
- Emitter Specifications:

Industrial Oven Emitter Sizes (in.)	Input Rating Btuh	
	WX- Series	G- Series
12 x 36	12,000	18,000
12 x 48	16,000	24,000
12 x 60	20,000	30,000
12 x 72	24,000	36,000
18 x 48	24,000	36,000
18 x 60	30,000	45,000
18 x 72	36,000	54,000
24 x 48	32,000	48,000
24 x 60	40,000	60,000
24 x 72	48,000	72,000