

STANDARD FEATURES


- suitable for Class I, Groups A, B, C & D or Class I, Groups A, B, C & D; Class II, Groups E, F & G; Class III (depending on temperature code)
- suitable for temperature codes T2D, T3B, T4A or T6 (depending on unit specified)
- high surface area black anodized heat emitter with integral tubular heating elements
- patented *x-Max* housing with slide out terminal block trolley simplifies installation and servicing
- nickel plated wire guards on all models
- universal support leg for wall or floor mounting

THERMOSTAT

- optional built-in externally adjustable bulb type thermostat field convertible to tamper-proof

OPTIONAL ACCESSORIES
(included if checked)

- (a) built-in, externally adjustable thermostat
- (b) remote mounting 'XT' model thermostat

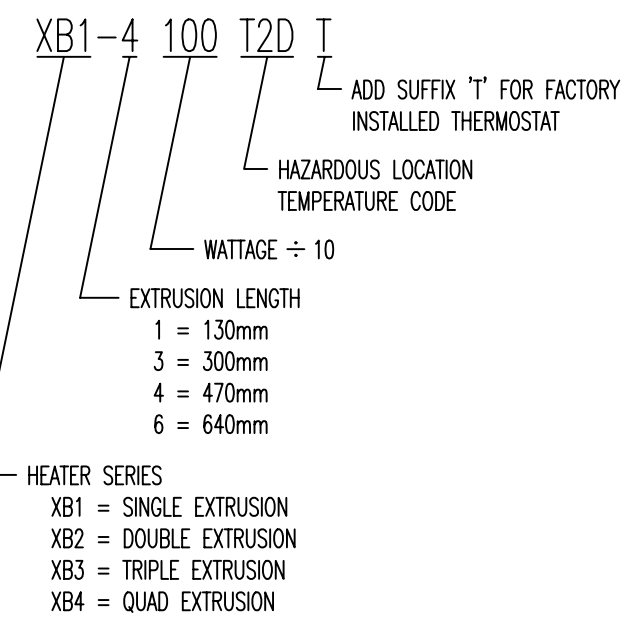

UNIT SUPPLIED AS CHECKED

TABLE 1 - SPECIFICATIONS FOR T2D UNITS - HAZARDOUS LOCATION RATING CL. I GR. A,B,C&D

WATTS	FIG. NO.	VOLTS	PHASE	'L' DIM. mm(IN)	'M' DIM. mm(IN)	APPROX WEIGHT KG (LBS)	CATALOG NO.	BASIC UNIT	WITH THERMOSTAT
475	1	120	1	254 (10.0)	184 (7.3)	4.5 (10)	XB1-1047T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	208	1				XB1-1047T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	240	1				XB1-1047T2D	<input type="checkbox"/>	<input type="checkbox"/>
750	1	120	1	424 (16.7)	184 (7.3)	6.8 (15)	XB1-3075T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	208	1				XB1-3075T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	240	1				XB1-3075T2D	<input type="checkbox"/>	<input type="checkbox"/>
1000	1	120	1	594 (23.4)	184 (7.3)	9.1 (20)	XB1-4100T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	208	1				XB1-4100T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	240	1				XB1-4100T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	480	1				XB1-4100T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	600	1				XB1-4100T2D	<input type="checkbox"/>	<input type="checkbox"/>
1250	1	120	1	765 (30.1)	184 (7.3)	11.3 (25)	XB1-6125T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	208	1				XB1-6125T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	240	1				XB1-6125T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	480	1				XB1-6125T2D	<input type="checkbox"/>	<input type="checkbox"/>
	1	600	1				XB1-6125T2D	<input type="checkbox"/>	<input type="checkbox"/>
1500	2	120	1	424 (16.7)	410 (16.1)	13.6 (30)	XB2-3150T2D	<input type="checkbox"/>	<input type="checkbox"/>
	2	208	1 OR 3				XB2-3150T2D	<input type="checkbox"/>	<input type="checkbox"/>
	2	240	1 OR 3				XB2-3150T2D	<input type="checkbox"/>	<input type="checkbox"/>
	2	120	1				XB2-4200T2D	<input type="checkbox"/>	<input type="checkbox"/>
	2	208	1 OR 3				XB2-4200T2D	<input type="checkbox"/>	<input type="checkbox"/>
2000	2	240	1 OR 3	594 (23.4)	410 (16.1)	18.1 (40)	XB2-4200T2D	<input type="checkbox"/>	<input type="checkbox"/>
	2	480	1 OR 3				XB2-4200T2D	<input type="checkbox"/>	<input type="checkbox"/>
	2	600	1 OR 3				XB2-4200T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	120	1				XB3-4300T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	208	1 OR 3				XB3-4300T2D	<input type="checkbox"/>	<input type="checkbox"/>
3000	3	240	1 OR 3	594 (23.4)	635 (25)	27.2 (60)	XB3-4300T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	480	1 OR 3				XB3-4300T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	600	1 OR 3				XB3-4300T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	120	1				XB3-6375T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	208	1 OR 3				XB3-6375T2D	<input type="checkbox"/>	<input type="checkbox"/>
3750	3	240	1 OR 3	765 (30.1)	635 (25)	34.0 (75)	XB3-6375T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	480	1 OR 3				XB3-6375T2D	<input type="checkbox"/>	<input type="checkbox"/>
	3	600	1 OR 3				XB3-6375T2D	<input type="checkbox"/>	<input type="checkbox"/>
	4	208	1 OR 3				XB4-6450T2D	<input type="checkbox"/>	<input type="checkbox"/>
	4	240	1 OR 3				XB4-6450T2D	<input type="checkbox"/>	<input type="checkbox"/>
4500	4	480	1 OR 3	765 (30.1)	860 (33.9)	45.4 (100)	XB4-6450T2D	<input type="checkbox"/>	<input type="checkbox"/>
	4	600	1 OR 3				XB4-6450T2D	<input type="checkbox"/>	<input type="checkbox"/>

TABLE 2 - OTHER STANDARD T2D UNITS - HAZARDOUS LOCATION RATING CL. I GR. A,B,C&D

WATTS	FIG. NO.	VOLTS	PHASE	'L' DIM. mm(IN)	'M' DIM. mm(IN)	APPROX WEIGHT KG (LBS)	CATALOG NO.	BASIC UNIT	WITH THERMOSTAT
								<input type="checkbox"/>	<input type="checkbox"/>
								<input type="checkbox"/>	<input type="checkbox"/>
								<input type="checkbox"/>	<input type="checkbox"/>

ITEM NO.	CATALOG NO.	VOLTS	PHASE	WATTS	HEATER SERIES	TEMP CODE	'L'	'M'	OPTIONAL FEATURES/ACCESSORIES

TITLE: APPROVAL DATA SHEET
XB EXPLOSION RESISTANT CONVECTION HEATER
50 TO 5000 WATTS

DWG: B12360A REV. 2

CUSTOMER: P.O.

PROJECT: